

#### MECHANICAL FEATURES

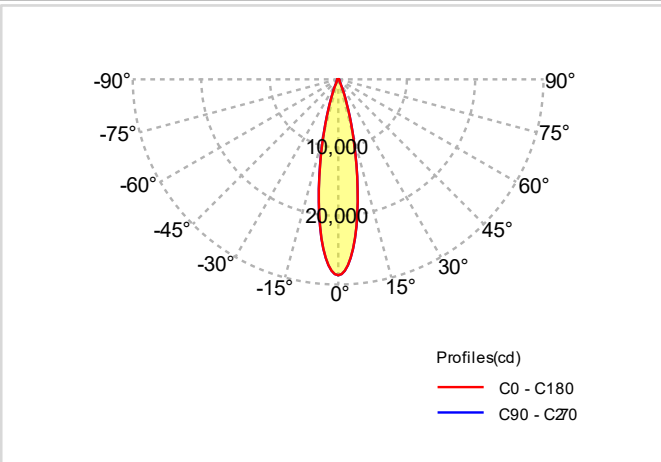
Device dimensions:	1200 x 600 x h250 mm 47.2 x 23.6 x h9.8 in	Sky-light size:	1070 x 520 mm 42.1 x 20.4 in
Necessary space for installation (largest volume including device, assembled frame, fixing kit):	1200 x 600 x h250 mm 47.2 x 23.6 x h9.8 in	Weight:	50 kg 110 lb
Fixing kit	The fixing kit is included without threaded rods. Ceiling fasteners are not supplied.		

#### ELECTRICAL FEATURES

#### FRAME

Type of source:	LED	Material and visible dimensions:	Recessed trim, Powder-coated steel sheet 1200 x 600 x h25 mm / 47.2 x 23.6 x h1 in
Light output control:	Dimmable by DALI or 0-10V	Weight:	3.8 kg / 8.4 lb
Light output range:	0.4-100%	Finishing:	White Matte, RAL 9010
Power input	2 channels at 24 V DC		
Max power consumption:	200 W		
Typical power consumption:	190 W		
Insulation Class	EU Class III (UL class 2)		
Power supply units and drivers:	Not included. Suggested driver: Mean Well HLG-100H-24A Order code: 27-00008-01 (two pieces required)		

DESCRIPTION	CERTIFICATIONS
Coelux HT25 is a recessed ceiling system that artificially reproduces natural light from the sky and the sun. It includes a LED light source, optical components and a Coelux Classic panel, all housed in a metal structure. Skylight dimensions: 1070 x 520 mm (42.1 x 20.4 in). Appearance of the sun: visible, slightly frosted. Beam direction: zenith. Appearance of the sky: clear. Frame: included (mandatory for optimal yield). It may also be mounted on normally inflammable surfaces. Inspection hatch: not required. It is recommended to position the power supplies remotely.	Certifications: CE, CB, UL, PSE Certified (DALI version) CE, CB, UL, PSE Ongoing certification (0-10V version)
	Certification code: Coelux HT25
	Warranty: 5 years

OPTICAL FEATURES	PHOTOMETRIC CURVES																								
<table border="1"> <tr><td>Total Light Output:</td><td>5900 lm</td></tr> <tr><td>Lumen maintenance(L90B10):</td><td>&gt; 50000 h</td></tr> <tr><td>LED CRI (Ra)</td><td>&gt; 92</td></tr> <tr><td>CCT of transmitted beam:</td><td>4800 K</td></tr> <tr><td>CCT of the Sky:</td><td>&gt; 10000 K</td></tr> <tr><td>Photometric diagram (simulated .ies .ldt file, without frame):</td><td>Available</td></tr> <tr><td>Beam angle:</td><td>Zenith</td></tr> <tr><td>Divergence-FWHM (H/V)(without frames, refer to photometric curves):</td><td>23°/23°</td></tr> <tr><td>Sun appearance:</td><td>Visible slightly frosted</td></tr> <tr><td>Sky appearance:</td><td>Clear</td></tr> <tr><td>Melanopic Ratio (Sky):</td><td>1.58</td></tr> <tr><td>Melanopic Ratio (Sun):</td><td>0.87</td></tr> </table>	Total Light Output:	5900 lm	Lumen maintenance(L90B10):	> 50000 h	LED CRI (Ra)	> 92	CCT of transmitted beam:	4800 K	CCT of the Sky:	> 10000 K	Photometric diagram (simulated .ies .ldt file, without frame):	Available	Beam angle:	Zenith	Divergence-FWHM (H/V)(without frames, refer to photometric curves):	23°/23°	Sun appearance:	Visible slightly frosted	Sky appearance:	Clear	Melanopic Ratio (Sky):	1.58	Melanopic Ratio (Sun):	0.87	
Total Light Output:	5900 lm																								
Lumen maintenance(L90B10):	> 50000 h																								
LED CRI (Ra)	> 92																								
CCT of transmitted beam:	4800 K																								
CCT of the Sky:	> 10000 K																								
Photometric diagram (simulated .ies .ldt file, without frame):	Available																								
Beam angle:	Zenith																								
Divergence-FWHM (H/V)(without frames, refer to photometric curves):	23°/23°																								
Sun appearance:	Visible slightly frosted																								
Sky appearance:	Clear																								
Melanopic Ratio (Sky):	1.58																								
Melanopic Ratio (Sun):	0.87																								

OPERATING CONDITIONS
Min/max operating temperature: -10 / 40 °C
Max operating relative humidity (no condensing): 95%
IP grade: IP20

SHIPPING INFORMATION
-1 Carton Box: 1280 x 760 x h540 mm / 50.3 x 29.9 x h21.2 in - 71 kg / 156,5 lb

ACCESSORIES	NOTES
<ul style="list-style-type: none"> <li>- 75-00050-01: CBU-A2D - Casambi wireless control unit configured for Coelux HT Classic DALI</li> <li>- 75-00054-01: CBU-A2D - Casambi wireless control unit configured for Coelux HT Classic 0-10V</li> <li>- 75-00057-01: Casambi Xpress - Casambi wireless Keypad user interface - White</li> <li>- 75-00058-01: Casambi Xpress - Casambi wireless Keypad user interface - Black</li> </ul>	<ol style="list-style-type: none"> <li>1) Please note that there are two Order codes for this product. Select the Order code that best suits your needs: HT25-3L-DAL-01 (DALI) and HT25-3L-010-01 (0-10 V).</li> <li>2) The power supply must be purchased separately, make sure you order it. The Order code is indicated in the section ELECTRICAL FEATURES (Power supply) of this datasheet.</li> <li>3) In order to ensure an easier maintenance, it is suggested to position the power supplies remotely.</li> </ol>